
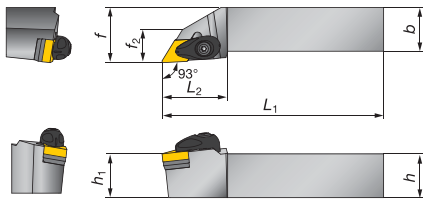


Applicable inserts
DN□□

Negative rake
Double clamping system

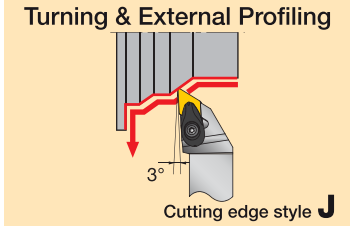

Right hand (R) shown.

4

TAC External Toolholders

Toolholders Cat. No.	Stock		Dimensions (mm)							Std. Corner r_E	Applicable inserts	Page
	R	L	h	b	L_1	L_2	h_1	f	f_2			
ADJNR/L2020K15-A	●	●	20	20	125	36	20	25	17	0.8	DN□□1504□□	2-52 ~ 3-7 ~ T-CBN 3-21 ~ T-DIA
ADJNR/L2525M15-A	●	●	25	25	150	36	25	32	18			
ADJNR/L3225P15-A	●	●	32	25	170	36	32	32	18			
ADJNR/L2020K1506-A	●	●	20	20	125	36	20	25	17	0.8	DN□□1506□□	2-52 ~
ADJNR/L2525M1506-A	●	●	25	25	150	36	25	32	18			

*Recommend clamping torque: 4.0 N·m