
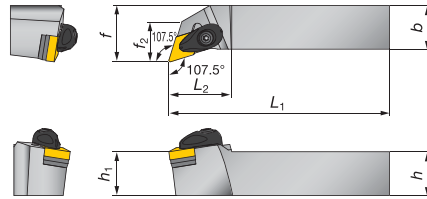


Applicable inserts
DN□□

Negative rake
Double clamping system

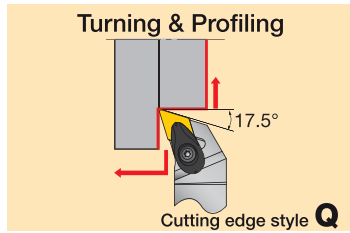

Right hand (R) shown.

Toolholders Cat. No.	Stock		Dimensions (mm)						Std. Corner r_{ϵ}	Applicable inserts	Page	
	R	L	h	b	L_1	L_2	h_1	f				f_2
ADQNR/L2020K15-A	●	●	20	20	125	32	20	25	21	0.8	DN□□1504□□	2-52 ~ 3-7 ~ T-CBN 3-21 ~ T-DIA
ADQNR/L2525M15-A	●	●	25	25	150	36	25	32	23			
ADQNR/L2020K1506-A	●	●	20	20	125	32	20	25	21	0.8	DN□□1506□□	2-52 ~
ADQNR/L2525M1506-A	●	●	25	25	150	36	25	32	23			

*Recommend clamping torque: 4.0 N·m