
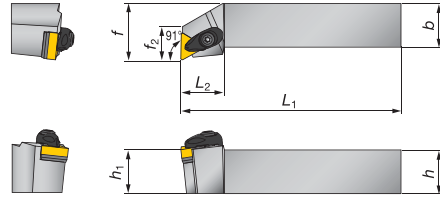


Applicable inserts
TN□□

Negative rake
Double clamping system



Right hand (R) shown.

Toolholders Cat. No.	Stock		Dimensions (mm)						Std. Corner r_{ϵ}	Applicable inserts	Page	
	R	L	h	b	L_1	L_2	h_1	f				f_2
ATFNR/L2020K16-A	●	●	20	20	125	25	20	25	18	0.8	TN□□1604□□	2-70 ~ 3-8 ~ T-CBN 3-21 ~ T-DIA
ATFNR/L2525M16-A	●	●	25	25	150	25	25	32	19			
ATFNR/L2525M22-A	●	●	25	25	150	29	25	32	23	0.8	TN□□2204□□	2-70 ~

*Recommend clamping torque: TN□□1604: 3.0 N·m, TN□□2204: 4.0 N·m