



Applicable inserts
SN□□

Negative rake
Lever-lock system

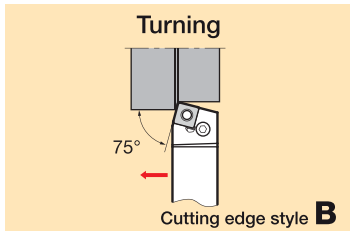

Right hand (R) shown.

Toolholders Cat. No.	Stock		Dimensions (mm)							Std. Corner r_{ϵ}	Applicable inserts	Page
	R	L	h	b	L_1	L_2	h_1	f	f_2			
PSBNR/L1616H09E			16	16	100	22	16	13	—	0.8	SN□□0903□□	2-61 ~
PSBNR/L2020K12E	●	●	20	20	125	28	20	17	—	0.8	SN□□1204□□	2-61 ~ 3-8 ~ T-CBN 3-21 ~ T-DIA
PSBNR/L2525M12E	●	●	25	25	150	24	25	22	—			
PSBNR/L3225P12E	●	●	32	25	170	28	32	22	—			
PSBNR/L2525M15E	●	●	25	25	150	35	25	22	—	1.2	SN□□1506□□	2-64 ~
PSBNR/L3225P15E			32	25	170	35	32	22	—			
PSBNR/L3232P15E	●	●	32	32	170	35	32	27	—			
PSBNR/L3232P19E	●	●	32	32	170	40	32	27	—	1.2	SN□□1906□□	2-64 ~
PSBNR/L4040R19E			40	40	200	40	40	35	—			
PSBNR/L5050T25E			50	50	300	48	50	43	—			

● : Stocked items.

4 TAC External Toolholders